

Style 1

Style 2



Engineering Class Rivetless Chain

Dimensions are in inches unless otherwise indicated.

Chain No.	Sidebar Style	Pitch	Inner Width Max	Inside Center Link Height Max	Plate Height Max	Plate Thick Max	Pin Diam Max	Pin Length Max	Average Ultimate Strength	Rated Working Load	Weight
		A	B	C	D	E	G	H	Lbs	Lbs	Lbs/Ft
X348	2	3.031	0.750	0.547	1.094	0.406	0.500	1.750	24,000	2,400	2.10
X458	2	4.031	1.000	0.688	1.375	0.469	0.625	2.250	48,000	4,800	3.20
X678	2	6.031	1.281	1.000	2.000	0.750	0.875	3.031	85,000	8,500	6.70
X678A*	2	6.031	1.281	1.000	2.000	0.750	0.875	3.031	100,000	10,000	6.70
698P	1	6.031	1.563	1.250	2.688	0.563	1.125	1.469	130,000	13,000	11.40
698A*	1	6.031	1.563	1.250	2.688	0.563	1.125	1.469	257,000	25,700	11.40
998P	1	9.031	1.563	1.250	2.656	0.625	1.125	3.781	130,000	13,000	9.00
998A*	1	9.031	1.563	1.250	2.656	0.625	1.125	3.781	265,000	26,500	9.00
9118P	1	9.031	1.953	1.531	3.063	0.750	1.375	4.875	220,000	22,000	16.00
9148A*	1	9.031	2.438	1.938	3.813	0.813	1.750	5.813	375,000	37,500	27.00

*Alloy Steel

Rivetless/Cat Dog Chain

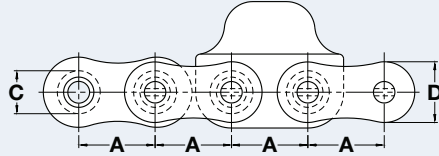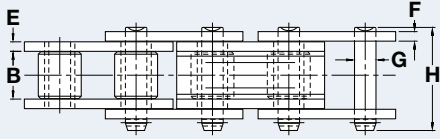

Engineering Class Cat Dog Chain

Dimensions are in inches unless otherwise indicated.

Chain No.	Pitch	Inner Width Max	Roller Diam Max	Plate Height Max	Inner Plate Thick Max	Outer Plate Thick Max	Pin Diam Max	Pin Length Max	Average Ultimate Strength	Rated Working Load	Weight	Dog Spacing
	A	B	C	D	E	F	G	H	Lbs	Lbs	Lbs/Ft	DOG SPACING
160X348	2.000	1.242	1.125	1.900	0.250	0.250	0.563	2.486	63,200	11,900	8.30	6TH
160X458	2.000	1.242	1.125	1.900	0.250	0.250	0.563	2.486	63,200	11,900	9.80	4TH
											8.00	6TH
160X678	2.000	1.242	1.125	1.900	0.250	0.250	0.563	2.486	63,200	11,900	10.30	6TH