



Rivet Extractors

Rivet Extractors for Chain Breaking

Screw-operated extractors break chain by forcing Renold's end-softened bearing pins out of the outer link plates. Typically, other brands of chains require that the rivet swell must first be ground away.

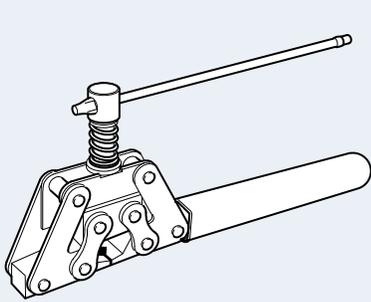

Part No. 10101
For use with chains:
0.375" to 0.625"
ANSI and BS Series

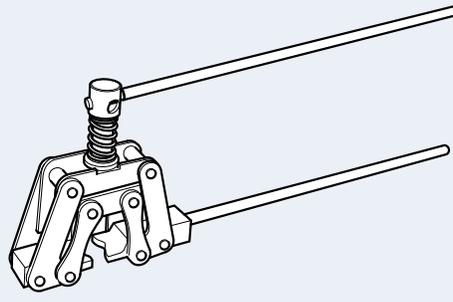

Part No. 10102
For use with chains:
0.75" to 1" ANSI Series
0.75" to 1.25" BS Series



Part Number	Pitch	
	ANSI	British Standard
10101	.375 to .625	.375 to .625
10102	0.75 to 1.00	0.75 to 1.25
311502	1.25 to 2.00	1.25 to 2.00
311503	2.00 to 4.00	2.00 to 4.00