

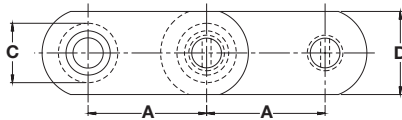
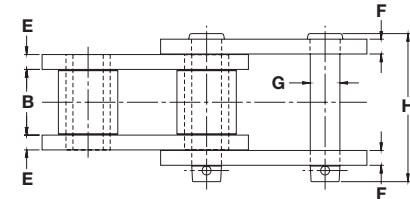


Drive Chain

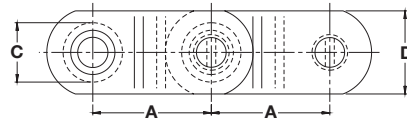

Style S (Straight Sidebar)

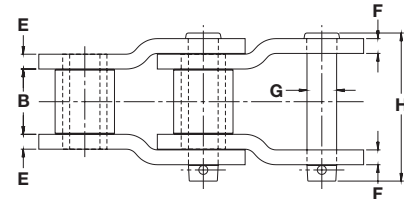

Style O (Offset Sidebar)

Engineered Class Drive Chain

Chain No.	Sidebar Style	Pitch	Inner Width	Roller/Bush Diameter	Plate Height	Plate Thickness	Pin Diameter	Pin Length	Average Ultimate Strength	Rated Working Load	Weight
		in	in	in	in	in	in	in	lbs	lbs	lbs/ft
		A	B	C	D	E/F	G	H			
2570	O	2.500	1.500	1.250	1.750	0.310	0.625	3.360	71,000	4,650	8.70
882	O	2.609	1.125	0.875	1.125	0.250	0.438	2.560	26,000	2,500	3.60
3011	O	3.067	1.563	1.625	2.250	0.375	0.750	3.750	113,000	6,100	13.10
1031	O	3.075	1.500	1.250	1.625	0.313	0.625	3.360	48,000	4,650	7.00
3075	O	3.075	1.500	1.250	1.750	0.375	0.650	3.660	73,000	5,100	9.00
3514	O	3.500	1.500	1.750	2.250	0.500	0.875	4.325	140,000	7,700	17.30
4414	O	4.000	2.750	2.250	2.750	0.500	1.250	5.890	116,000	16,000	25.00
4014	O	4.063	1.938	1.750	2.250	0.500	0.875	4.703	140,000	9,000	15.40
1245	O	4.073	1.940	1.781	2.375	0.563	0.940	5.060	170,000	10,000	18.70
4522	O	4.500	2.063	2.250	3.000	0.560	1.100	5.310	220,000	12,300	25.00
5031	O	5.000	2.750	2.500	3.500	0.625	1.250	6.234	280,000	17,500	33.72
6042	O	6.000	3.000	3.000	4.000	0.750	1.500	7.190	420,000	23,700	46.80
6056	S	6.000	3.250	3.500	5.000	0.875	1.750	7.940	550,000	30,000	72.00
6555	O	6.500	3.250	3.500	5.000	0.875	1.748	7.938	600,000	30,500	66.00
7055	O	7.000	3.250	3.500	5.000	0.875	1.750	8.000	600,000	30,500	65.00
7080	S	7.000	3.250	4.500	6.000	0.875	2.120	8.060	800,000	48,000	66.00